

SR7002

THX SELECT2 SURROUND SOUND A/V RECEIVER



Performance addicted? Just call this Marantz your enabler. With THX Select2 certification and 110 watts of continuous power per channel (yes, 110 watts from each of its seven current-feedback amplifiers!), the SR7002 opens up the home entertainment horizon for the most demanding yet cost-conscious customers out there.

Let's look at video capabilities first. You can connect up to four HDMI equipped sources to the SR7002. Direct the one you want to your display and to the SR7002's built-in surround sound processor. Unlike earlier HDMI connections, these handle multi-channel sound with ease. Still enjoying non-HDMI sources? Rest easy. The SR7002 comes complete with format conversion lets you watch older videos through the super convenient HDMI format. And there's a Second Zone audio/video output, too, so you can enjoy your entertainment throughout your entire home. You'll also find Dolby Virtual Speaker so you can enjoy an immersive surround experience with the dialog clarity inherent in a discrete center channel configuration with just two speakers!

And, speaking of clarity, the SR7002 features Audyssey's remarkable Auto Calibration that examines your entire room to corrects for the acoustical problems that sometimes make those other seats (and you know which ones we mean, don't you?) just as rewarding as the ones directly in front of your display device's screen. Of course, there's an infrared input and two DC trigger outputs so you can coordinate your entire system for convenient remote operation.

You won't have any problem fitting all this capability into your home either. We've housed the SR7002 in a new, compact chassis that will fit more easily into even the tightest spaces. But be sure you leave enough room for the SR7002 to breathe, OK? After all, killing a Marantz (besides being almost impossible to do) is an entertainment felony of the first order. But don't worry. Our three year warranty is very forgiving.

- 110 watts (into 8 ohms) x 7 ch Amps
- THX Select2 certification
- All discrete "Current Feedback" amplifier stages
- HDMI (V1.3a) Repeating: 4-In / 1-Out
- 32bit DSP
- XM Ready with discrete IR commands
- Dolby TrueHD, Dolby Digital +, Pro Logic IIx (Movie/Music/Game),
- DTS HD Master DTS 96/24, ES (Discrete 6.1/Matrix6.1), Neo:6
- SRS Circle surround II
- Audyssey Auto Calibration
- Up-Conversion (w/TBC) to HDMI with 480i/480P converter
- Dual Component Video outputs
- 192 kHz/24-bit D/A converters for all channels
- HDCD® Decoder
- Dielectric Protected Binding Posts
- Speaker A/B switching
- 2nd Zone A/V output (Individual source) w/discrete commands
- Dolby Headphone
- Lip sync. control
- Assignable HD compatible component video switching (4 in / 2 out)
- RS-232C terminal for system control
- Direct IR Flasher Input
- x2 DC Trigger outputs
- D-BUS (RC-5 In/Out) remote connection
- Front panel A/V/Optical inputs
- Learning/pre-programmed backlit remote with LCD
- 1 switched and 1 un-switched AC convenience outlets
- New shallow chassis < 16"
- Three year limited warranty



Compatible

marantz®

Life Amplified™

SR7002

FEATURES

MULTICHANNEL/SURROUND

Number of Channels	7
THX	Select 2
DTS (HD,ES, Discrete 6.1/ Matrix 6,1, Neo-6)	(+ 96/24)
Dolby True HD	.
Dolby Digital Plus	.
Circle Surround II	.
SOUND ENHANCEMENTS	
HDCD Decoder	.
Current Feedback Topology	.
Discrete Amplification	(All 7ch)
Power Transformer	Ei
D/A Conversion	192kHz/24-Bit
Digital Signal Processing	Ti 32-Bit
Video Off	.
Source Direct	.
Chassis	Metal
Variable X-over	.
Display Off	.
Video Up-conversion	Up to HDMI (w/ TBC)
Auto Calibration	(Audyssey MultiEQ)
XM-Ready	.
AM/FM tuner	.
Bass management	.
Lip-sync (digital audio delay)	.
Software Upgradable (RS232)	.

IN/OUTPUTS

VIDEO	
HDMI In	4
Component In	4 (Assignable Inputs)
S-Video In	5
Composite In	5
HDMI Out	2
Component Out	2
S-Video Out	3
Composite Out	4
AUDIO	
Analog L&R In	7
Analog L&R Out	5
Digital Optical In	4
Digital Coaxial In	3
Digital Optical Out	1
Digital Coaxial Out	1
IEEE1394 connection	-

IN/OUTPUTS (continued)

OTHER	
Pre-Amplifier Out	8ch
Main Amplifier In	-
Multi-Channel In	8ch
Multi-Room Audio Out	.
Multi-Room Video Out	(Composite)
Multi-Room Speaker Out	.
Speaker A/B	.
External control (RS232C)	.
DC Triggers	2
D-Bus Remote (RC-5) In/Out	2/2
External IR In/Out	1/0
Front Panel A/V Inputs	(+ Digital Opt.)
Headphone Out	(Dolby Headphone)
AC Outlets (Switched/Unswitched)	1/1

SPECIFICATIONS

AUDIO SECTION


Power Output (8 Ohm)	110W x 7
S/N Ratio	105db
Freq. Response (Analog In)	8Hz - 100kHz (+/- 3 dB)
Freq. Response (Dig In)	8Hz - 45kHz (+/- 3 dB)
TUNER SECTION FM	
Frequency Range	87.5 - 108.0MHz
S/N Ratio (Mono/Stereo)	Mono/Stereo: 75/70 dB
TUNER SECTION AM	
Frequency Range	520 - 1710kHz
S/N Ratio	50 dB

VIDEO SECTION

Video Freq. Response (Component)	5Hz - 80MHz (-1 dB)
Video Freq. Response (Composite, S-Video)	5Hz - 8MHz (-1 dB)
Signal to Noise	60dB

GENERAL

Color	Black
Front Panel	Aluminum
Remote Control	Learning/Pre-coded with LCD RC8001SR
Power Requirement	AC 120V/60Hz
Power Consumption	750w
Dimensions W" x H" x D" (Inches)	17 5/16" x 7 1/4" x 15 5/8"
Weight (lbs)	33.1

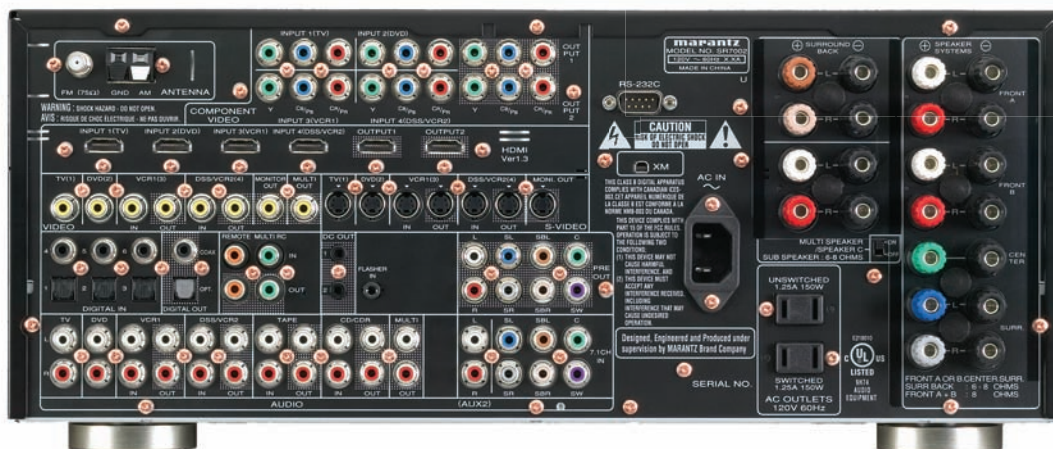

*All specifications, dimensions and weights are subject to change without notice.

D&M Holdings, Marantz America, Inc. or any of its subsidiaries will not assume any liability for errors in this spec sheet which may result in consequential errors being made by retail dealers, designers, custom installers, cabinet makers or end users, etc based upon information contained within this document.

© 08/07 Marantz America, Inc. • 100 Corporate Drive • Mahwah, New Jersey 07430 • 201-762-6500 • www.us.marantz.com