

SPECIFICATIONS & DIMENSIONAL DRAWINGS

FM tuner section

Frequency range	87.5 MHz ~ 108.0 MHz
Antenna terminals	75 Ω/ohm Unbalanced
Usable sensitivity	1.1 μV (12.2 dBf)
.....	1.1 μV (IHF)
Image interference ratio.....	80 dB
IF interference ratio.....	100 dB
AM suppression ratio	50 dB
Effective selectivity.....	50 dB (±400 kHz)
Capture ratio	2.0 dB
Frequency characteristics	20 Hz ~ 15 kHz +0.5/−1.0dB
Signal-to-noise ratio	
Monaural	74 dB (IHF), 70 dB (DIN)
Stereo.....	68 dB (IHF), 64 dB (DIN)
Total harmonic distortion	
Mono 1 kHz (at 75 kHz dev.)	0.2 %
Stereo 1 kHz (at 67.5 kHz dev.)	0.3 %
Stereo separation 1 kHz (WIDE)	43 dB

DAB tuner section

Frequency range	
.....174.928 (5A) ~ 239.200 (13F) MHz (BAND III)	
..1452.960 (LA) ~ 1490.624 (LW) MHz (L-BAND)	
Sensitivity.....	−99 dBm
Signal-to-noise ratio.....	103 dB
THD+N	0.007 % (1 kHz)
Channel separation	100 dB (1 kHz)
Selectivity	40 dB (at adjacent channel)

Frequency response

.....	+0.5/−0.5 dB (5 Hz ~ 20 kHz)
Digital output	Optical, Coaxial
Sampling frequency	48 kHz
Aerial terminal	75 Ω/ohm, F female
Analog output level	2 Vrms

AM tuner section

Frequency range	522 kHz ~ 1611 kHz
Antenna terminals	Terminal type with loop antenna
Usable sensitivity	18 μV
Signal-to-noise ratio	53 dB


General

Power supply	AC 230 V, 50 Hz
Power consumption	12 W
Weight	12.3 kg

Accessories

Audio connecting cord.....	1
Power supply cord.....	1
AM loop antenna	1
FM indoor antenna	1
DAB indoor antenna.....	1
Remote Control Connecting Cord	1
User Guide	1
Registration Card	1

* For purposes of improvement, specifications and design are subject to change without notice.

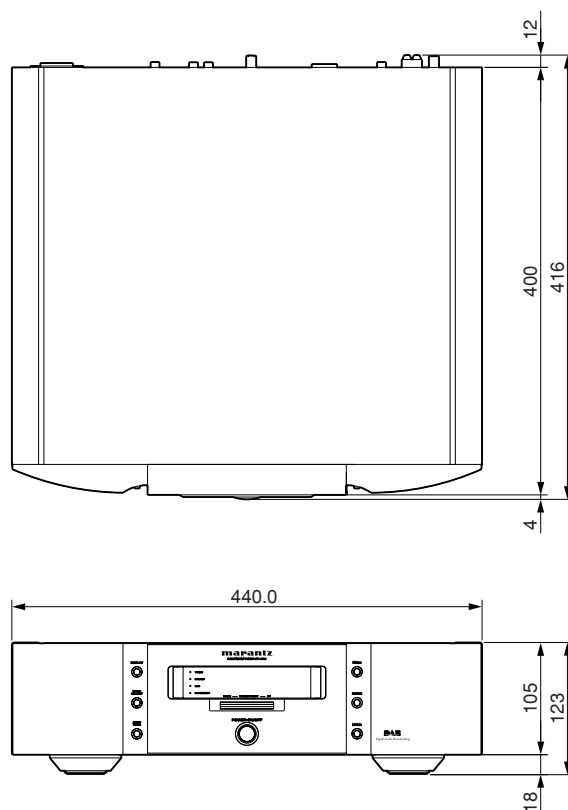

(Unit: mm)